OPS COMPLIANT IHSE DRACO KVM



OPEN PLUGGABLE MEDIA PLAYER SPECIFICATION (OPS) BY INTEL®

Intel® Digital Signage OPS specification Media Player or source PC Standardized system architecture Enabling integrated display solutions Simplifies digital signage infrastructure Broad application range Up to 4K/60 Hz 4:4:4 resolutions

Source switching: any source to any display

A KVM matrix switch enables simple connection of any source, of any signal type to any display; ensuring the right content is seen on every screen, whenever it is needed and wherever it is. Through a convenient user control interface or bespoke controller.



Reliability and continuous operation

By centrally locating source computers, system maintenance and up-time is improved. Controlled switching and enhanced monitoring from a central point raises confidence in the operational integrity of the display network.



Security in Operation

KVM extenders greatly enhance security by restricting physical access and preventing electrical intrusion. With controlled access to computers and secured access rights, only authorized personnel can reach sensitive and critical source devices.






A WINNING COMBINATION

IHSE KVM extension

- Single wire extension up to 5 km
- Fiber connection
- Full matrix switching for multi-display systems
- Visually lossless 4K/60 Hz 4:4:4 resolution 10 bit
- Fully interactive
- Embedded USB 2.0
- Link redundancy



Draco vario ultra KVM-Extender

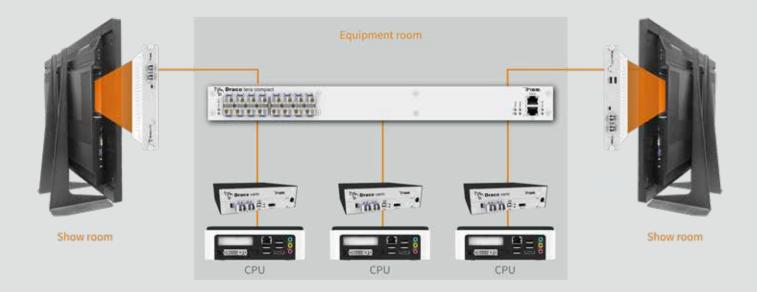



IHSE DRACO KVM

Draco OPS & Draco OPS ultra

- ☐ Single wire connection to displays
- ☐ Industry-wide display compatibility
- Enabling GPU workstation performance
- ☐ Highest performing graphics (fanless)
- ☐ Enhanced maintainability
- Full interactivity



DRACO OPS (1920 X 1200 @ 60 HZ)	CON UNIT (LOCAL)	SERIES 482
HID Redundant	Discensive and Discensive Control of the Control of	R482-OPHCR upon request!
HID Redundant	Done or	R482-OPHSR

DRACO ULTRA OPS (4096 X 2160 @ 60 HZ)	CON UNIT (LOCAL)	SERIES 490
4 K 60 Hz ULTRAHD HID Redundant XV	Description (pt.)	R490-OPECXR upon request!
4 K 60 Hz HID Redundant XV	Barrens der . (B) D rest	R490-OPEXR



SIMPLE SOLUTION - MULTIPLE APPLICATIONS

Draco OPS KVM extender

The Draco OPS KVM extender simplifies the installation, operation and management of remote displays in retail signage, passenger information, medical and other applications.

A single module inserted into a standard OPS socket delivers HD and 4K video and digital audio connectivity, with full interactivity.

IHSE enables you to overcome the CPU/GPU power limitations of the OPS form factor by connecting remote PCs without any noticeable latency.

For hard-to-access and highly secure installations and for better system management the Draco OPS KVM extender delivers the ideal solution.





Education



Venues



Retail



Airports



Banking



Medical



Government



Industrial



CONTACT IHSE





IHSE GmbH - Headquarters

Maybachstr. 11 88094 Oberteuringen Germany

८ +49 (7546) 9248-0 **₽** +49 (7546) 9248-48

info@ihse.de www.ihse.de

IHSE USA LLC

1 Corporate Drive Cranbury, NJ 08512 United States

L +1 (732) 738 878 0

info@ihseusa.com www.ihseusa.com

IHSE GmbH Asia Pacific Pte Ltd

158 Kallang Way, #07-13A Singapore 349245

4 +65 (6841) 470 7

info@ihseapac.com www.ihseapac.com

IHSE Frankreich

Catherine Berriat Paris France

4 +33 (678) 478 822

catherine.berriat@ihse.de www.ihse.de

IHSE Israe

Yehuda Levin Shoham Israel

\(+972 (544) 320 768

levin.yehuda@ihse.de www.ihse.de

